


10G COLOR TO

Features


- Data rate: 10G
- Operation temperature: -40~85°C
- RoSH-6 compliance

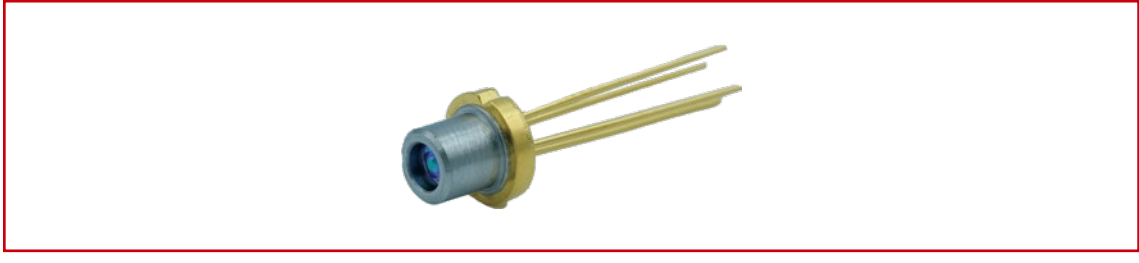

Standard Parts

No.	Name	Model	Rate	Temperature (°C)	Output power Ith+20mA	Wavelength	Interface	Stitching	Chip type
1	10G COLOR TO	TACXXFV	10G	-40~85°C	≥5mW	1271~1491nm	TO	4	DFB
2	10G BIDI TO	TAC27FV/ TAC33FV	10G	-40~85°C	≥6mW	1270nm/1330n	TO	4	DFB

Dimensions and Pinouts

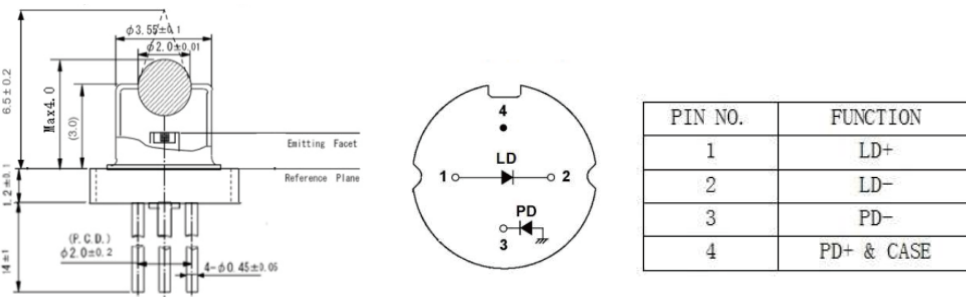

25G COLOR TO


Features

- Data rate: 10G
- Operation temperature: -40~85°C
- RoSH compliance

Standard Parts

No.	Name	Model	Rate	Temperature (°C)	Output power Ith+20mA	Wavelength (nm)	Interface	Stitching	Chip type
1	25G COLOR TO	TCEXEV	25G	-40~85°C	≥6.5mW	1271~1371	TO	5	DFB
2	25G BIDI TO	TCE27EV/ TCE33EV	25G	-40~85°C	≥5mW	1270nm/1330n	TO	5	DFB

Dimensions and Pinouts

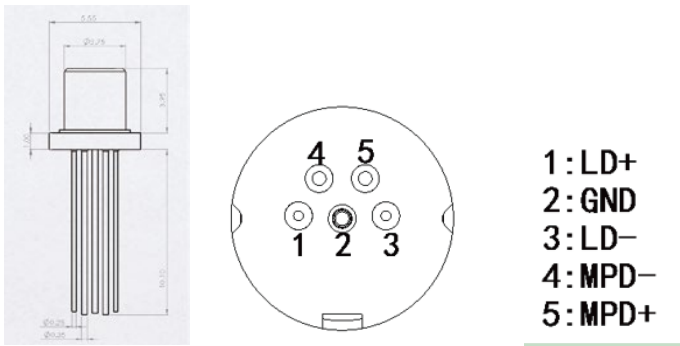

XG COMB PON OLT TO

Features

- Data rate: 1.25/25G
- Operation temperature: -40~85°C
- RoSH compliance

Standard Parts

No.	Name	Model	Rate	Temperature (°C)	Wavelength (nm)	Interface	Stitching	Chip type
1	XG COMB PON OLT TO	TGW13AM	1.25G	-40~85°C	1310	TO46	6PIN	APD

Dimensions and Pinouts

